


Certified by ISO9001 International Quality Control System

JXC-300BIK-IL Series LED Bike Lamps

Features

- Compliance with applicable ITE/Caltrans specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliance with to FCC Title 47
- Full compatibility with NEMA controllers/conflict monitors
- Even brightness & standard chromatogram

Dimensions

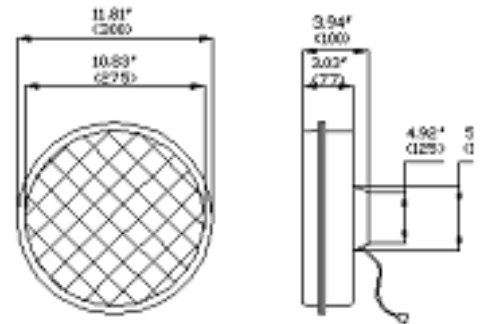

Model Number	Size (mm)	Color (nm)	Voltage (Typical)	Voltage Range	Power(w) Typical	Operation Temperature	Power Factor	T.H.D	Caltrans Specs.
JXC-300BIKR-IL	300	Red (626)	120V~60hz	80v~135v	7.5	-40°F ~ +165°F	> 0.9	< 20%	Yes
JXC-300BIKY-IL	300	Yellow (592)	120V~60hz	80v~135v	7.5	-40°F ~ +165°F	> 0.9	< 20%	Yes
JXC-300BIKG-IL	300	Green (505)	120V~60hz	80v~135v	7.5	-40°F ~ +165°F	> 0.9	< 20%	Yes

Note: Size of 200 mm and voltage of 220 V are also available upon request.

All characteristics, including chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are in compliance with the standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact: