


Certified by ISO9001 International Quality Control System

JXC300-HF Series Hi-Flux LED Vehicular Lamps (Clear)

Features & Specifications

- Compliance with latest ITE specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliant to FCC Title 47
- Fully compatible with NEMA controllers/conflict monitors
- Uniform incandescent appearance with Hi-Flux technology

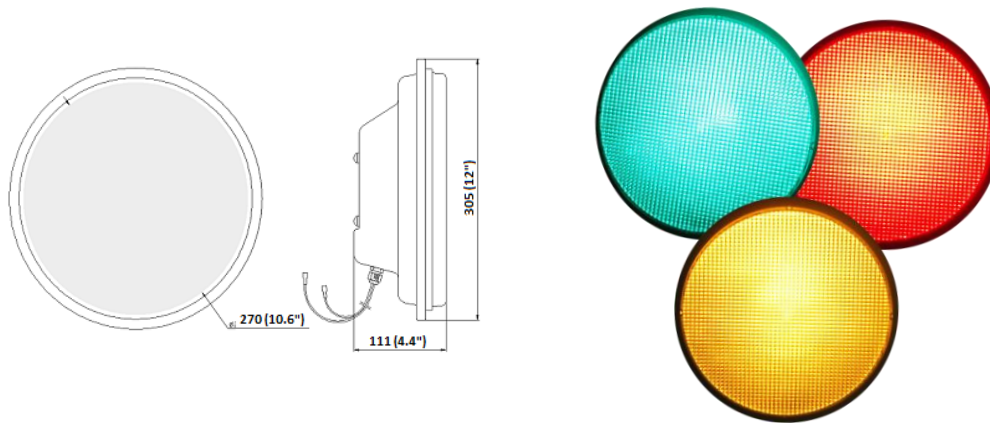

Model Number	Size (mm)	Color (nm)	Lens Color	Voltage Range	Power (W)	Operation Temp.	Power Factor	T.H.D	ITE Specs
JXC300-HFR-C	300	Red (626)	Clear	80v-135v	9.5	-40°F ± 165°F	> 0.9	< 20%	Yes
JXC300-HFY-C	300	Yellow (592)	Clear	80v-135v	16	-40°F ± 165°F	> 0.9	< 20%	Yes
JXC300-HFG-C	300	Green (505)	Clear	80v-135v	11	-40°F ± 165°F	> 0.9	< 20%	Yes

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact us at (972) 480-0888 or visit our website at www.trastarusa.com.